

PD3000 SERIES CUSTOMER DISPLAYS SPECIFICATIONS

OPTICAL (FLUORESCENT DISPLAY)

| | |
|-------------------------|-------------------------|
| Digits per Row | 20 |
| Number of Rows | 2 |
| Digit Configuration | 5 x 7 Dot Matrix |
| Digit Height | 0.20 in. (5.0mm) |
| Digit Width | 0.14 in. (3.5mm) |
| Digit Pitch | 0.20 in. (5.0mm) |
| Character Configuration | ASCII |
| Brightness | 200 fl (690 cd/m2) max. |
| Display Color | Green |
| MTBF | 300,000 hours |

ELECTRICAL

| | |
|-----------------------------|-------------------------|
| Input Power (to adapter) | 120VAC, 60Hz |
| | 220VAC, 60Hz (optional) |
| Output Power (from adapter) | 6.0VAC, 1000mA |
| Connector | 2 conductor female jack |
| Pole Connector | 6-pin DIN (male) |
| Interface Cable | |
| Pole side connector | 6-pin DIN (female) |
| Computer side connector | DB9 (female) |
| Power connector | 2 conductor male jack |

ENVIRONMENTAL

| | |
|--------------------------|-------------------------|
| Operating Temperature | 0 to +50C |
| Storage Temperature | -20 to +70C |
| Relative Humidity | |
| Operating | 85% max. non-condensing |
| Non-operating | 90% max. non-condensing |
| Vibration (10 to 55 Hz.) | 4 G's |
| Shock | 40 G's |

INTERFACE

| | |
|---|--------------------------------|
| Serial | RS232C |
| Protocol: | |
| Baud Rate | 600, 1200, 2400, 9600*, 19,200 |
| Data Bit | 8 |
| Parity | None |
| Stop Bits | 1, 2* |
| RTS/CTS Control lines are tied together in the connector. | |
| DSR/DCD/DTR Control lines are tied together in the connector. | |

| | |
|-----------|--------------------|
| Parallel | Optional Interface |
| Pass-Thru | Serial, Parallel |
| USB | Optional Interface |

* Preset at Factory

GENERAL INFORMATION

Power adapter and 6 foot cable (with DIN 6F and DB9F connectors) are supplied with product.

POLE DISPLAY EMULATION

The PD3000 series pole display is extremely versatile. It can emulate many other pole display command sets and support OPOS.

MECHANICAL


| | |
|------------------------|--------------------------|
| Weight | 2.7 lbs. |
| Dimensions (in inches) | (width x height x depth) |
| Fluorescent Display | 7.87 x 3.37 x 1.75 |
| Rectangular Base | 2.12 x 2.00 x 2.25 |
| Base Plate | 4.00 x 0.90 x 8.00 |
| Overall Height | 8 to 25 inches |

CONNECTOR PINOUT

DB9 Female connector


| Pin # | Function |
|-------|----------|
| 1 | DCD |
| 3 | Data |
| 4 | DTR |
| 5 | Ground |
| 6 | DSR |
| 7 | RTS |
| 8 | CTS |

SERIAL



DB25 Female connector


| Pin # | Function |
|-------|----------|
| 2 | Data |
| 7 | Ground |
| 4 | RTS |
| 5 | CTS |
| 6 | DSR |
| 8 | DCD |
| 20 | DTR |

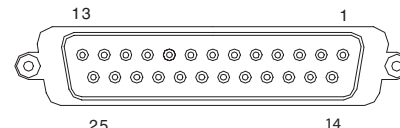

PARALLEL

DB25 Male connector

| Pin # | Function | Pin # | Function |
|-------|----------|-------|---------------------|
| 1 | -Strobe | 10 | -ACK |
| 2 | Data 0 | 11 | Busy |
| 3 | Data 1 | 12 | Paper End |
| 4 | Data 2 | 13 | Select |
| 5 | Data 3 | 14 | -Auto Feed |
| 6 | Data 4 | 15 | -Error |
| 7 | Data 5 | 16 | -Initialize Printer |
| 8 | Data 6 | 17 | -Select Input |
| 9 | Data 7 | 18-25 | Ground |

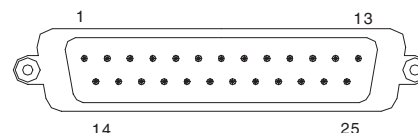

ORDERING INFORMATION

| | |
|--------------------------------------|-----------------------------|
| PD3 | U |
| COMMAND SET | USB INTERFACE |
| 0 = LOGIC CONTROLS | POWER ADAPTER |
| 1 = LOGIC CONTROLS WITH PASS - THRU | 0 = 120VAC |
| 2 = SPECIAL COMMAND SET 1 (Aedex) | 1 = 220VAC |
| 3 = SPECIAL COMMAND SET 2 (Noritaki) | |
| 4 = SPECIAL COMMAND SET 3 (Epson) | SERIAL / PARALLEL INTERFACE |
| 5 = SPECIAL COMMAND SET 4 (UTC) | 0 = SERIAL 9600 BAUD |
| 9 = OPOS | 1 = " 600 " |
| | 2 = " 1200 " |
| | 3 = " 2400 " |
| | 4 = " 4800 " |
| | 5 = " 19200 " |
| | 9 = PARALLEL INTERFACE |